

GP2015

NO BAFFLE

General Applications

The size, efficiency and operating economy of the GP 2015 make it an ideal choice for multiple dwellings, waterfront property, subdivision developments and marinas. The GP 2015 is ideally suited for both new and existing communities.

General Features

The GP 2015 Grinder Pump is a complete unit that includes: two grinder pumps with check valves, FRP (Fiberglass Reinforced Polyester) tank and controls. The GP 2015 is packaged into a single complete unit, ready for installation.

All solids are ground into fine particles, allowing them to pass easily through the pump, check valve and small-diameter pipelines. Even objects not normally found in sewage, such as plastic, rubber, fiber, wood, etc., are ground into fine particles.

The 1 1/4-inch discharge connection is adaptable to any piping materials, thereby allowing it to meet local code requirements.

The tough, corrosion-resistant tank is made of FRP (Fiberglass Reinforced Polyester). The optimum tank capacity of 275 gallons is based on computer studies of water usage patterns. A single GP 2015 is ideal for up to six average, single-family homes, and can also be used for up to 20 average, single-family homes with the consent of the factory. This model can accommodate flows of 5000 GPD.

The internal check valve assembly, located in each grinder pump, is custom-designed for non-clog, trouble-free operation.

The grinder pump is automatically activated and runs infrequently for very short periods. The annual energy consumption is typically that of a 40-watt light bulb.

Units are available for indoor and outdoor installations. Outdoor units are designed to accommodate a wide range of burial depths.

Operational Information

Motor

1 hp, 1,725 rpm, high torque, capacitor start, thermally protected, 120/240V, 60 Hz, 1 phase

Inlet Connections

4-inch inlet grommet standard for DWV pipe. Other inlet configurations available from the factory.

Discharge Connections

Pump discharge terminates in 1 1/4-inch NPT female thread. Can easily be adapted to 1 1/4-inch PVC pipe or any other material required by local codes.

Discharge*

15 gpm at 0 psig (per pump)

11 gpm at 40 psig (per pump)


9 gpm at 60 psig (per pump)

Control Panel

This station is designed to use the Alternating Control Panel, MOD T260.

Overload Capacity

The maximum pressure that the pump can generate is limited by the motor characteristics. The motor generates a pressure well below the rating of the piping and appurtenances. The automatic reset feature does not require manual operation following overload.

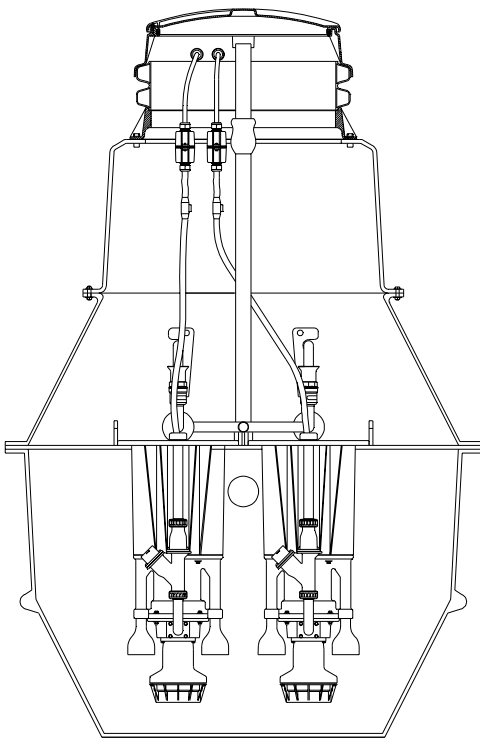


Patent Numbers: 5,752,315 5,562,254
5,439,180

* Discharge data includes loss through check valve, which is minimal

PA1349P02 Rev. -, 3/03


2015 NO BAFFLE

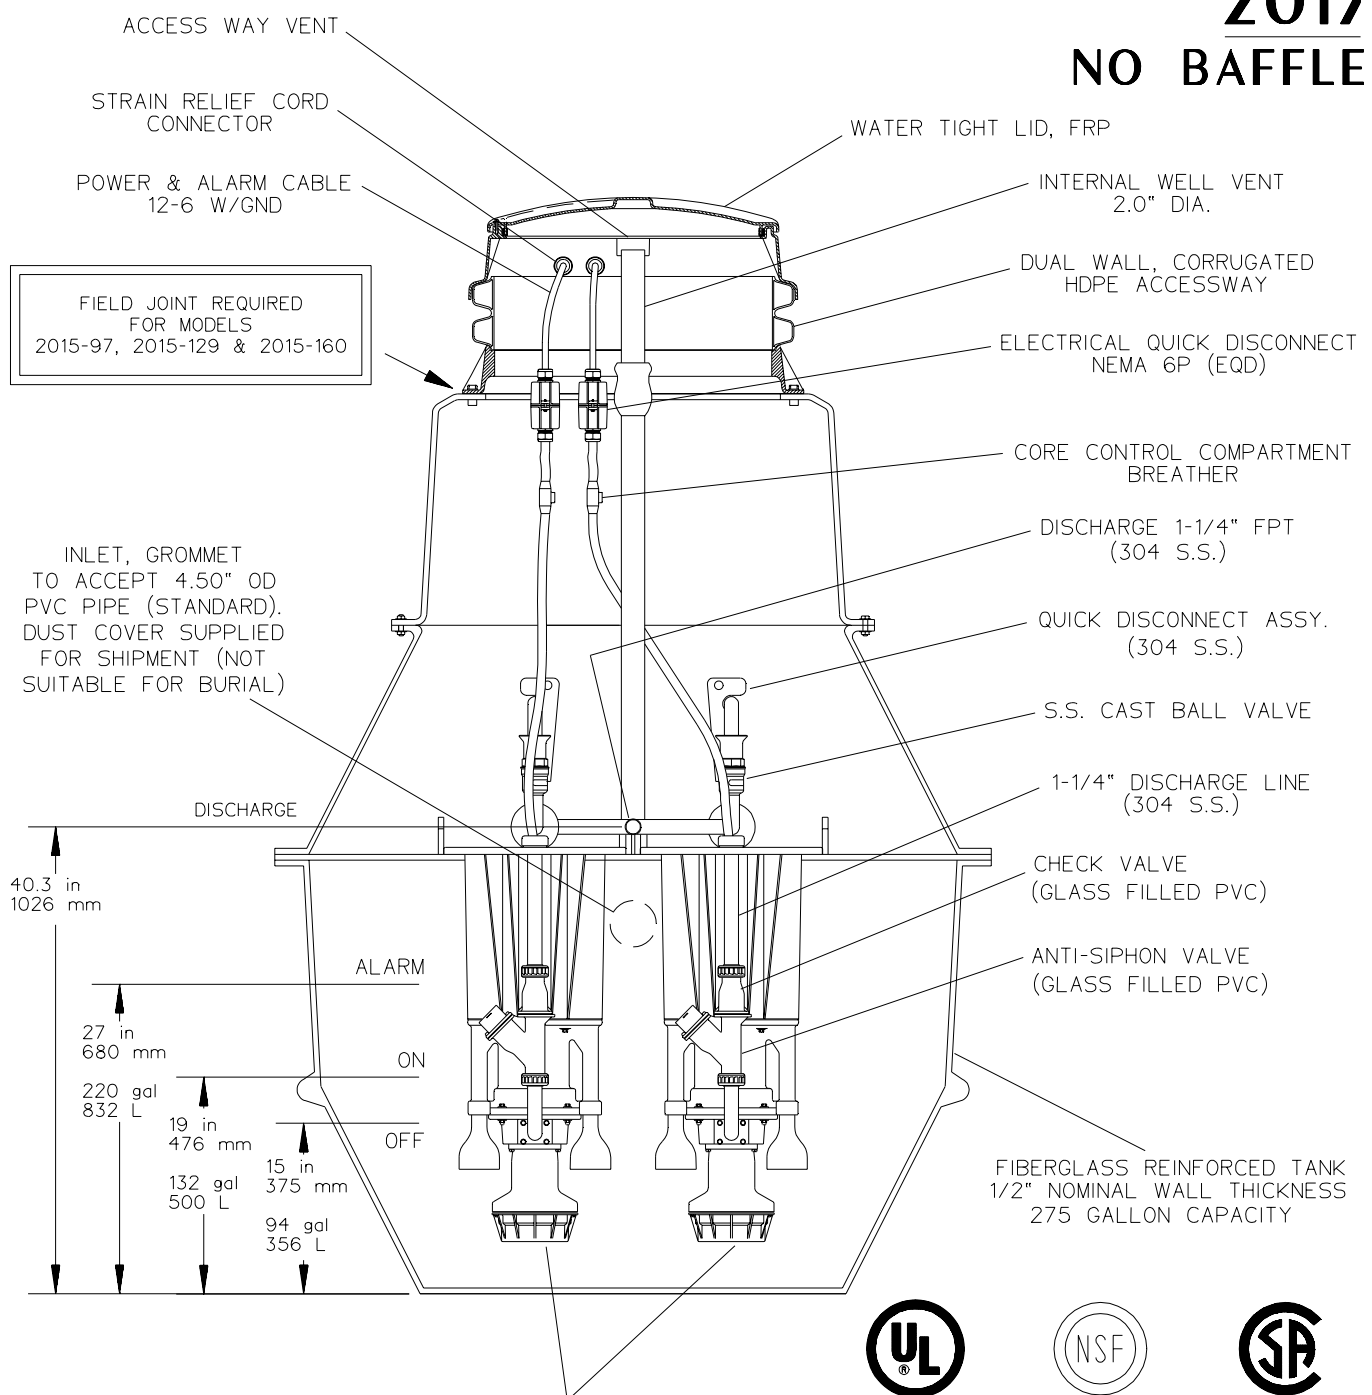

SEMI-POSITIVE DISPLACEMENT TYPE PUMP.
EACH DIRECTLY DRIVEN BY A 1 HP MOTOR
CAPABLE OF DELIVERING 9 gpm AT 138' T.D.H.
(34 lpm AT 42m T.D.H.)



SGS	CAH	03/26/03	-	1/16
DR BY	CHK'D	DATE	ISSUE	SCALE




MODEL 2015, DETAIL SHEET, NO BAFFLE

PA0911P02

SEE INSTALLATION INSTRUCTIONS FOR BALLAST DETAILS

2015-38

INDOOR UNIT

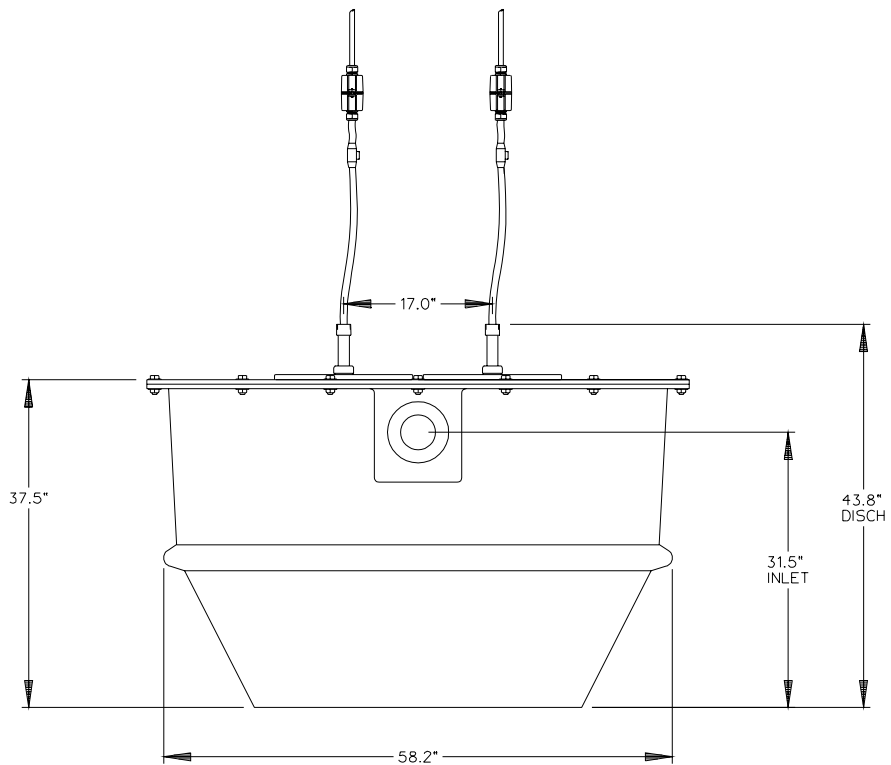

DISCHARGE: 1-1/4 MALE
PIPE THREAD

INLET: EPDM GROMMET FOR
4" DWV PIPE (STANDARD)





SGS	CAH	09/08/01	B	1/20
DR BY	CHK'D	DATE	ISSUE	SCALE



MODEL 2015-38

PA0899P05

2015-97

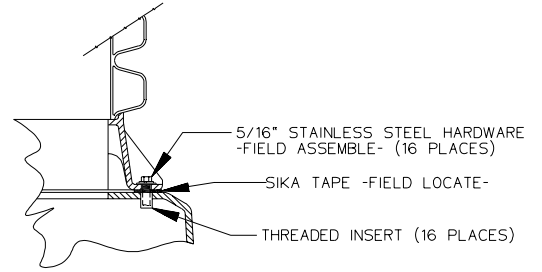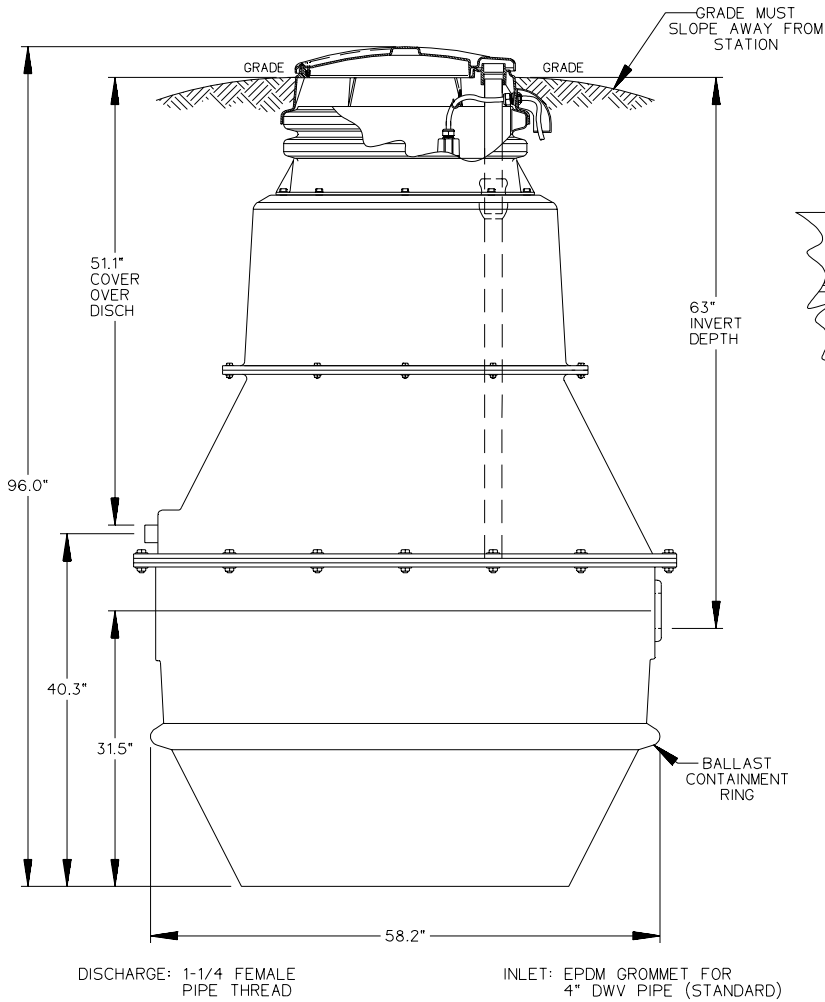

DETAIL, FIELD JOINT
 SEE INSTALLATION INSTRUCTIONS FOR FURTHER DETAILS



SGS	CAH	8/13/01	B	1/20
DR BY	CHK'D	DATE	ISSUE	SCALE




MODEL 2015-97

PA0899P02

SEE INSTALLATION INSTRUCTIONS FOR BALLAST DETAILS

2015-129

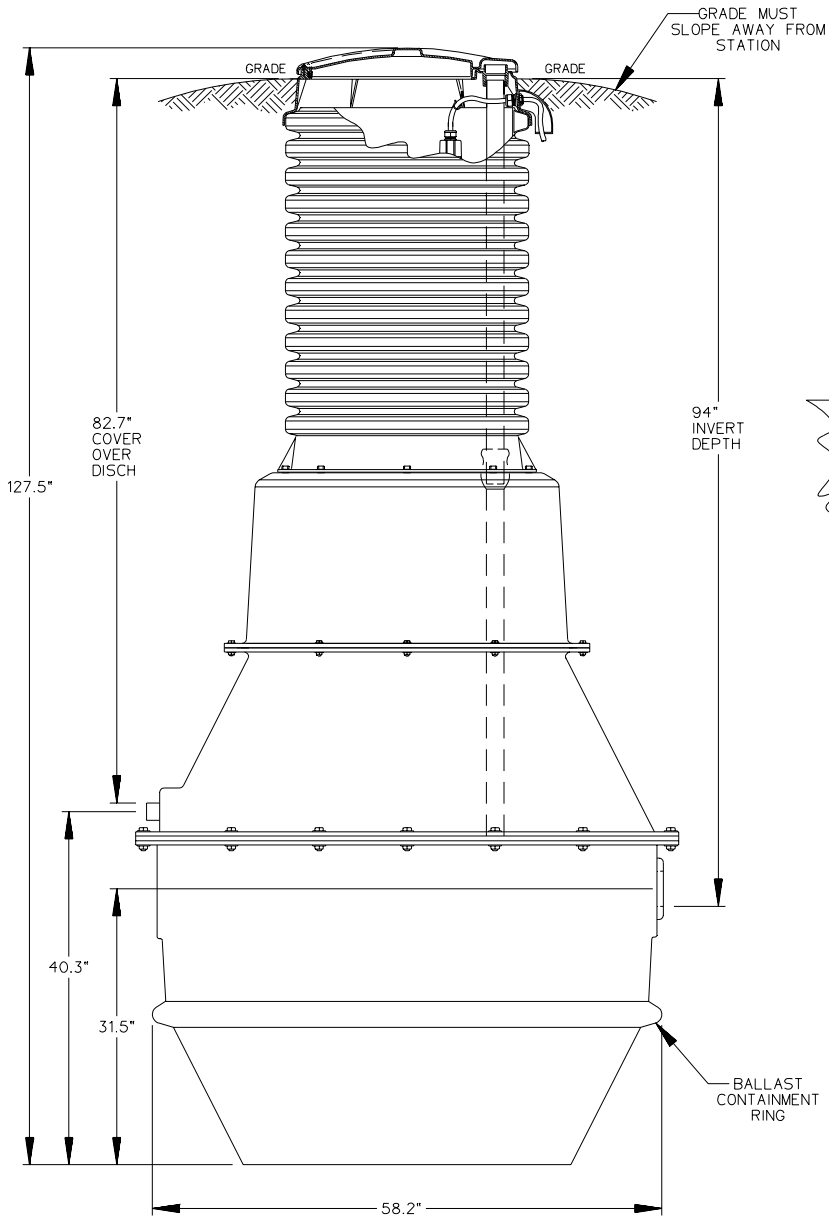

GRADE MUST SLOPE AWAY FROM STATION

82.7" COVER OVER DISCH

94" INVERT DEPTH

127.5"

40.3"


31.5"

58.2"

BALLAST CONTAINMENT RING

DISCHARGE: 1-1/4 FEMALE PIPE THREAD

INLET: EPDM GROMMET FOR 4" DWV PIPE (STANDARD)

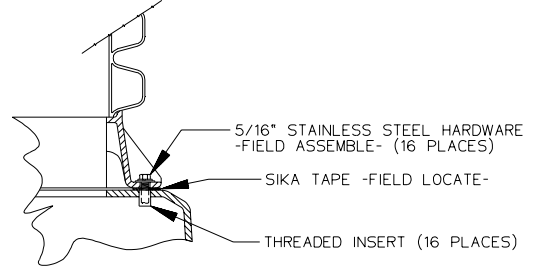

DETAIL, FIELD JOINT

SEE INSTALLATION INSTRUCTIONS FOR FURTHER DETAILS



SGS	CAH	8/13/01	B	1/20
DR BY	CHK'D	DATE	ISSUE	SCALE





MODEL 2015-129

PA0899P03

SEE INSTALLATION INSTRUCTIONS FOR BALLAST DETAILS

2015-160

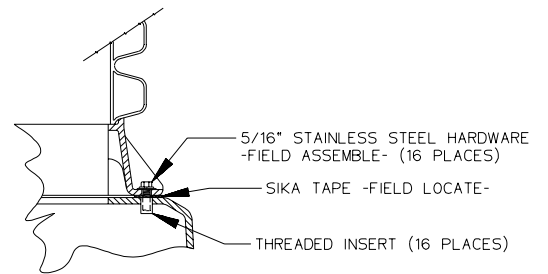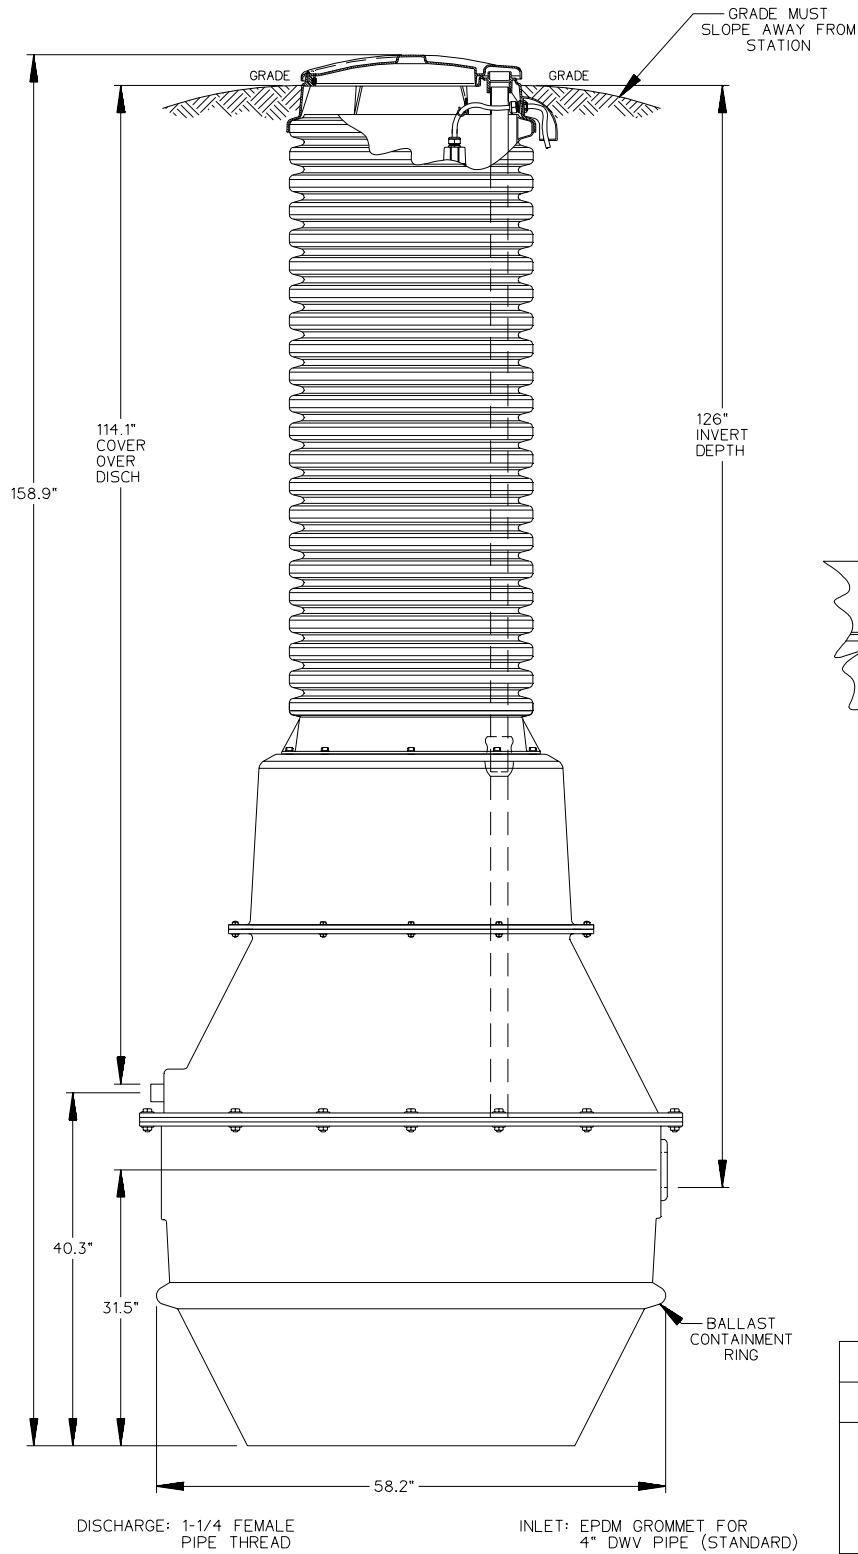

DETAIL, FIELD JOINT

SEE INSTALLATION INSTRUCTIONS FOR FURTHER DETAILS

SEE INSTALLATION INSTRUCTIONS FOR BALLAST DETAILS



SGS	CAH	8/13/01	B	1/16
DR BY	CHK'D	DATE	ISSUE	SCALE



MODEL 2015-160

PA0899P04